



Where to Buy : Replacement Parts : Contact Us : About Warn : Careers :



- BROWSE BY APPLICATION
- WINCHES
- HOISTS
- WINCH ACCESSORIES
- MOUNTING SYSTEMS
- BUMPERS
- OFF-ROAD LIGHTS
- BODY ARMOR
- PLOW SYSTEMS
- 4WD HUBS
- AX FENDER FLARES
- APPAREL

:: QUICK LINKS ::

- WHERE TO BUY
- REPLACEMENT PARTS
- FIND PRODUCTS BY VEHICLE
- CONTACT US
- CAREER OPPORTUNITIES

Jeep, Truck & SUV Winches: XD9000



WARN XD9000
Long time best selling winch

Long-time best seller. A durable 9,000 lb. winch with a compact body and separate control pack that allows you to use it in tight spaces. Comes with 100' of 5/16" wire rope. Backed by the Warn Limited Lifetime Warranty.

- New, next generation electrical control box and hand-held remote control
- Low-profile design and separate control box allows for a wide range of mounting options
- Exclusive brake design provides superior control while winching
- Durable 3-stage planetary geartrain for smooth, reliable, operation
- Series-wound, high-speed motor provides fast line speed and strong pulls
- Chip-resistant, powder-coated finish
- 100' of 5/16" (30m of 8mm) diameter wire rope

XD9000 SPECS

Part number: 28500 (12V)
Part number: 265012 (24V) *Contact WARN Customer Service for Availability*
Rated line pull: 9,000 lbs., (4080 kgs.) single-line
Motor: Series Wound: 12V 4.6 hp, 24V 2.5 hp
Electrical controls: Contactor
Remote Control: Remote switch, 12 ft (3.7m) lead
Geartrain: 3-Stage Planetary
Gear ratio: 156:1
Clutch (freespooling): Sliding Ring Gear
Brake: Automatic Direct Drive Cone
Drum diameter/Length: 2.5 in/9.0 in (6.4cm/23cm)
Weight: 78 lbs. (35kgs.)
Wire rope: 100 ft, 5/16 in dia. (30m, 8mm)
Fairlead: Roller
Recommended Battery: 650 CCA minimum for winching
Battery leads: 2 gauge, 72 in (1.83m)
Finish: Argent Gray Powder Coat

12V DC PERFORMANCE SPECS

Line Pull Lbs.(Kgs.)	Line Speed FT./min(M/min.)	Motor Current	Pull by layer layer/Lbs(Kgs.)
0	38(11.6)	70 amps	1/9000(4082)
2000(910)	14.4(4.39)	180 amps	2/8190(3715)
4000(1810)	11(3.35)	255 amps	3/7500(3402)
6000(2720)	8.67(2.64)	330 amps	4/7010(3180)
8000(3630)	6.88(2.10)	415 amps	
9000(4080)	6.38(1.94)	460 amps	

24V DC PERFORMANCE SPECS

Line Pull Lbs.(Kgs.)	Line Speed FT./min(M/min.)	Motor Current	Pull by layer layer/Lbs(Kgs.)
0	22.5(6.86)	46 amps	1/9000(4082)
2000(910)	14.5(4.42)	93 amps	2/8190(3715)
4000(1810)	11(3.35)	131 amps	3/7500(3402)
6000(2720)	9.1(2.77)	169 amps	4/7010(3180)
8000(3630)	7.9(2.41)	207 amps	5/6570(2980)
9000(4080)	7.4(2.26)	226 amps	

Above performance specs are based on first layer of drum

Replacement Parts


XD9000 Operator's Manual


XD9000 (CE Version) Operator's Manual

XD9000 12V Parts List (SN 1134880 & Up)

XD9000 24V Parts List (SN 822866 & Up)

Winching Techniques



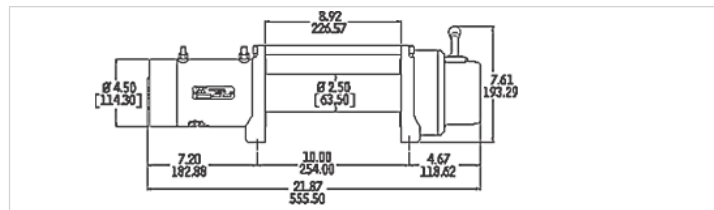

Winch Dimensions: 21.8" L. x 6.3" D. x 7.6" H.
(555mm L. x 160mm D. x 193mm H.)
Mounting Bolt Pattern: 10.0" x 4.5" (254mm x 114.3mm)

APPLICATIONS

Truck/Jeep Off-Road
Powersports Off-Road
Hunting & Outdoors
Adventure Touring/Motorcycle
Utility & Construction
Tow Trucks
Fire & Rescue
Original Equipment Manufacturer

RESOURCES

Authorized Service Centers
Product Literature
Product Registration
Warranty Statements
Sponsorship/Donation Requests
Newsletter
Site Map

COMPANY

About Warn
History
Quality and Environmental Policy
Code of Business Conduct & Ethics
Career Opportunities
Press Releases
Recalls/Safety Notifications
Transparency in Supply Chains Disclosure

PARTNERS

Partners Site
Red Letter Dealer Program
Merchandising Items

Copyright Warn Industries, Inc All rights reserved. Legal Statement
Warn Industries, Inc. standard purchase order Terms and Conditions